


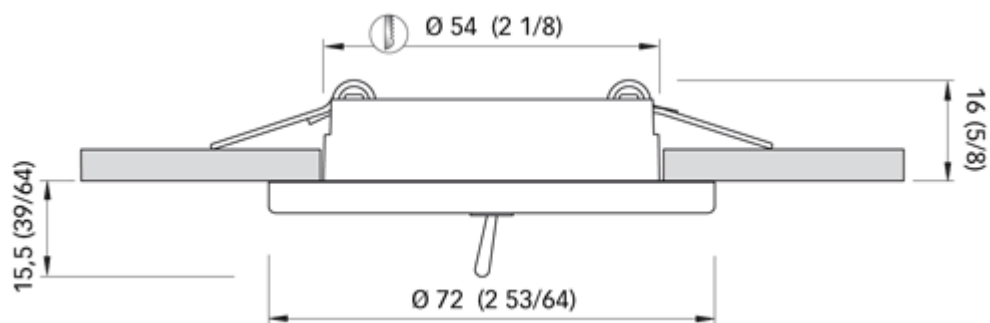

Specifications

Power type	Constant Voltage
Light source	22 x HIGH LUMINOSITY
Supply	10 ÷ 30 V
Power consumption	2 W
Current consumption	0.08 A @ 24V
Average lifetime	50,000 h
Dimmable	Yes
IP security degree	40


Dimensions

Frame	$\varnothing 3 \frac{9}{16}$ "
Recess	63/64" (Thickness)


Design

Frame material	AISI 316 S/STEEL
Finishings	MIRROR POLISHED / SATIN / WHITE 9010
Light colours	DAYLIGHT / WARM WHITE / RED / BLU
Mounting	SCREWS
Switch	Yes

Photometric data

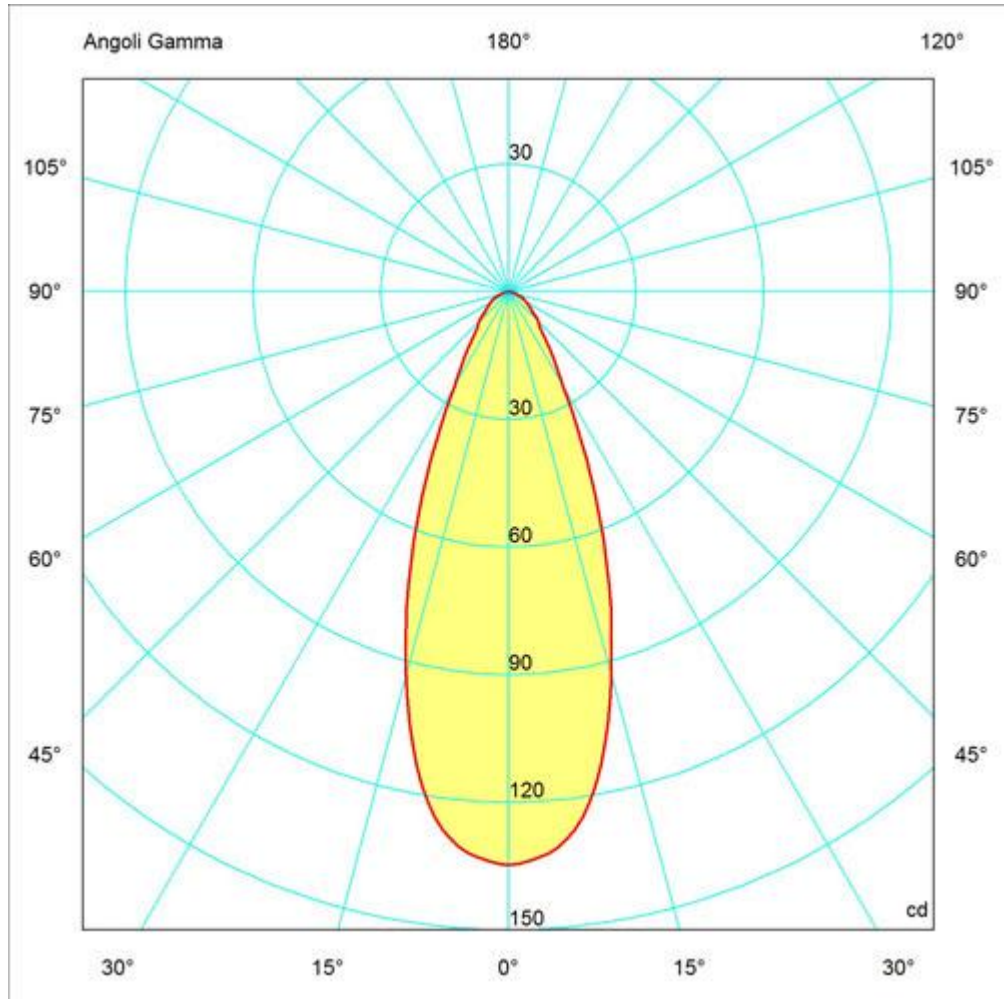

	3800-4200 °K	
Angle	40°	
Light flow	95 lm	
Efficiency	48 lm/W	
Lighthness - distance 1 m	Ø 0.73 m	134.7 lux
Lighthness - distance 2 m	Ø 1.45 m	33.7 lux
Lighthness - distance 3 m	Ø 2.18 m	15 lux

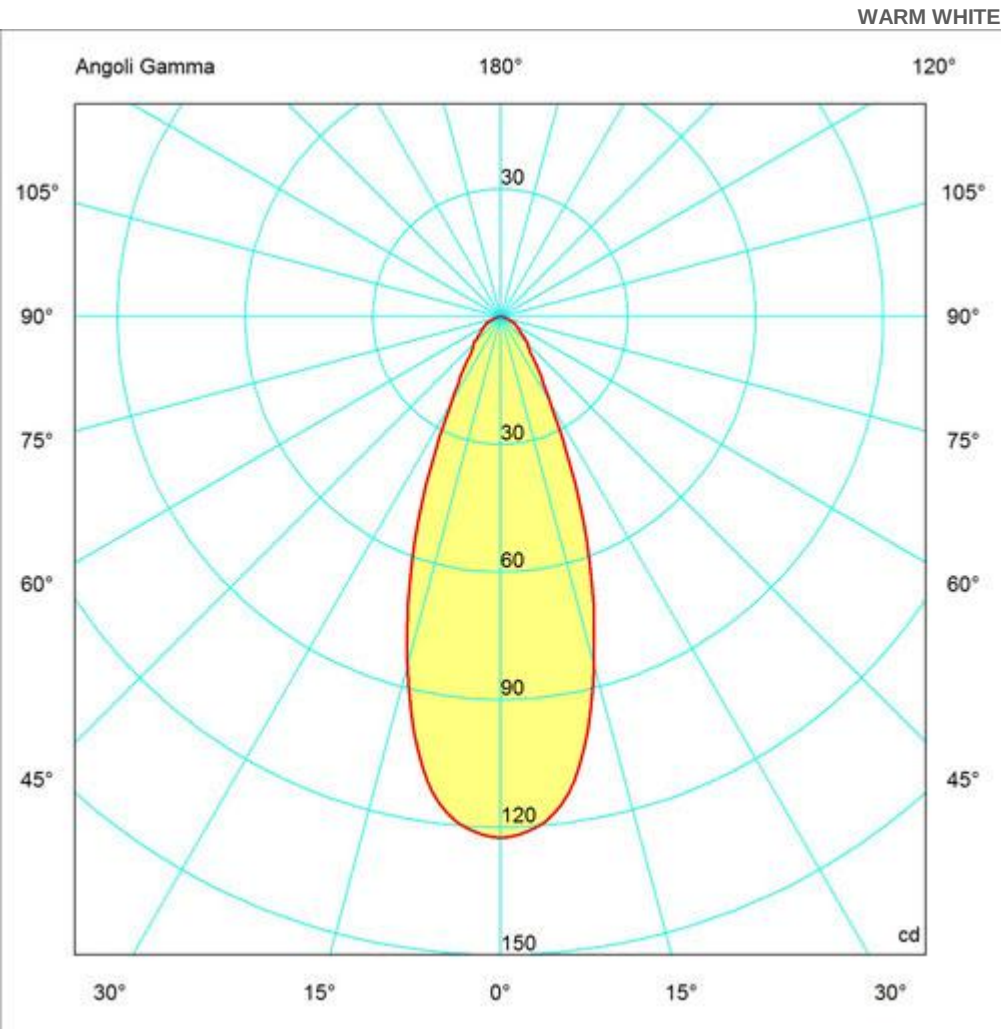

	2800-3100 °K	
Angle	40°	
Light flow	85 lm	
Efficiency	43 lm/W	
Lighthness - distance 1 m	Ø 0.73 m	122.5 lux
Lighthness - distance 2 m	Ø 1.45 m	30.6 lux
Lighthness - distance 3 m	Ø 2.18 m	13.6 lux

RED

Angle	40°
-------	-----

BLU

Angle	40°
Certifications	



LED Protection: Spike protected $\pm 500V$
Polarity sensitive: YES